


THE MINI LIVE GUARD SYSTEM

SPECIFICATIONS

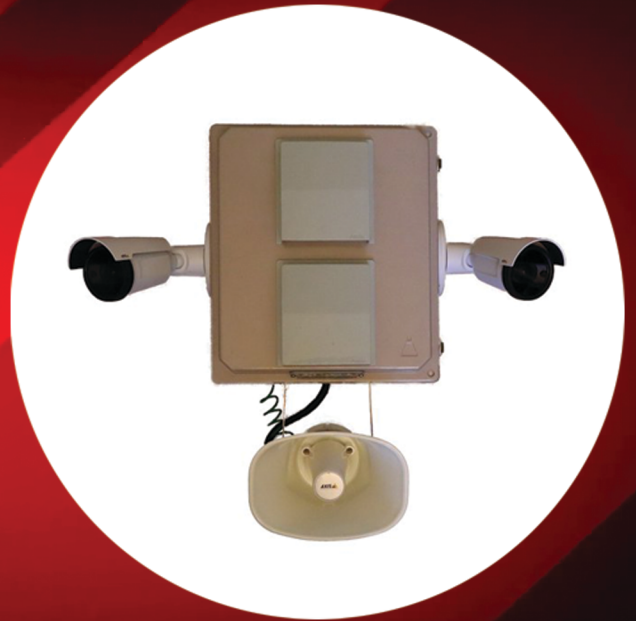

FORM FACTOR

Dimensions: 12"D x 12"W x 18"H
Enclosure: Dual Locking Latches,
Double Venting w/
Fan & Thermostat
Mounting: Unistrut Universal
Mounting Applications



EQUIPMENT & FEATURES

- ▶ (2) M2036-E Network Bullet Camera
- ▶ (1) Pyle 30 watt Loudspeaker
- ▶ (1) High Intensity Blue/Red Strobe Lights

Analytics & Software:

Live Shield Advanced Video Monitoring Services &
Mobile Application

Details: www.onsightlive.com/live-shield

 **1833 346 5483**

Contact Us

4904 S Power Rd Ste 103-208 Mesa, AZ 85212
www.onsightlive.com / email: contact@onsightlive.com

LIKE US : [FACEBOOK.COM/ONSIGHTLIVESURVEILLANCE](https://www.facebook.com/ONSIGHTLIVESURVEILLANCE)

WWW.ONSIGHTLIVE.COM/LIVE-GUARD



POWER & NETWORK



Plug-in Cord: 110VAC

Option Solar Kit:

Solar Panel: 1 x 100W Solar Panel

Battery: 1 x 115Ah 12VDC Battery

Charge Controller: 20A MPPT



Network: Industrial Grade 4G LTE Router
& 12VDC POE Switch